



BeneWood
luxury Flooring



Resilient Flooring





Resilient Flooring



Resilient Flooring






Resilient Flooring



B1201-2 / 190-12



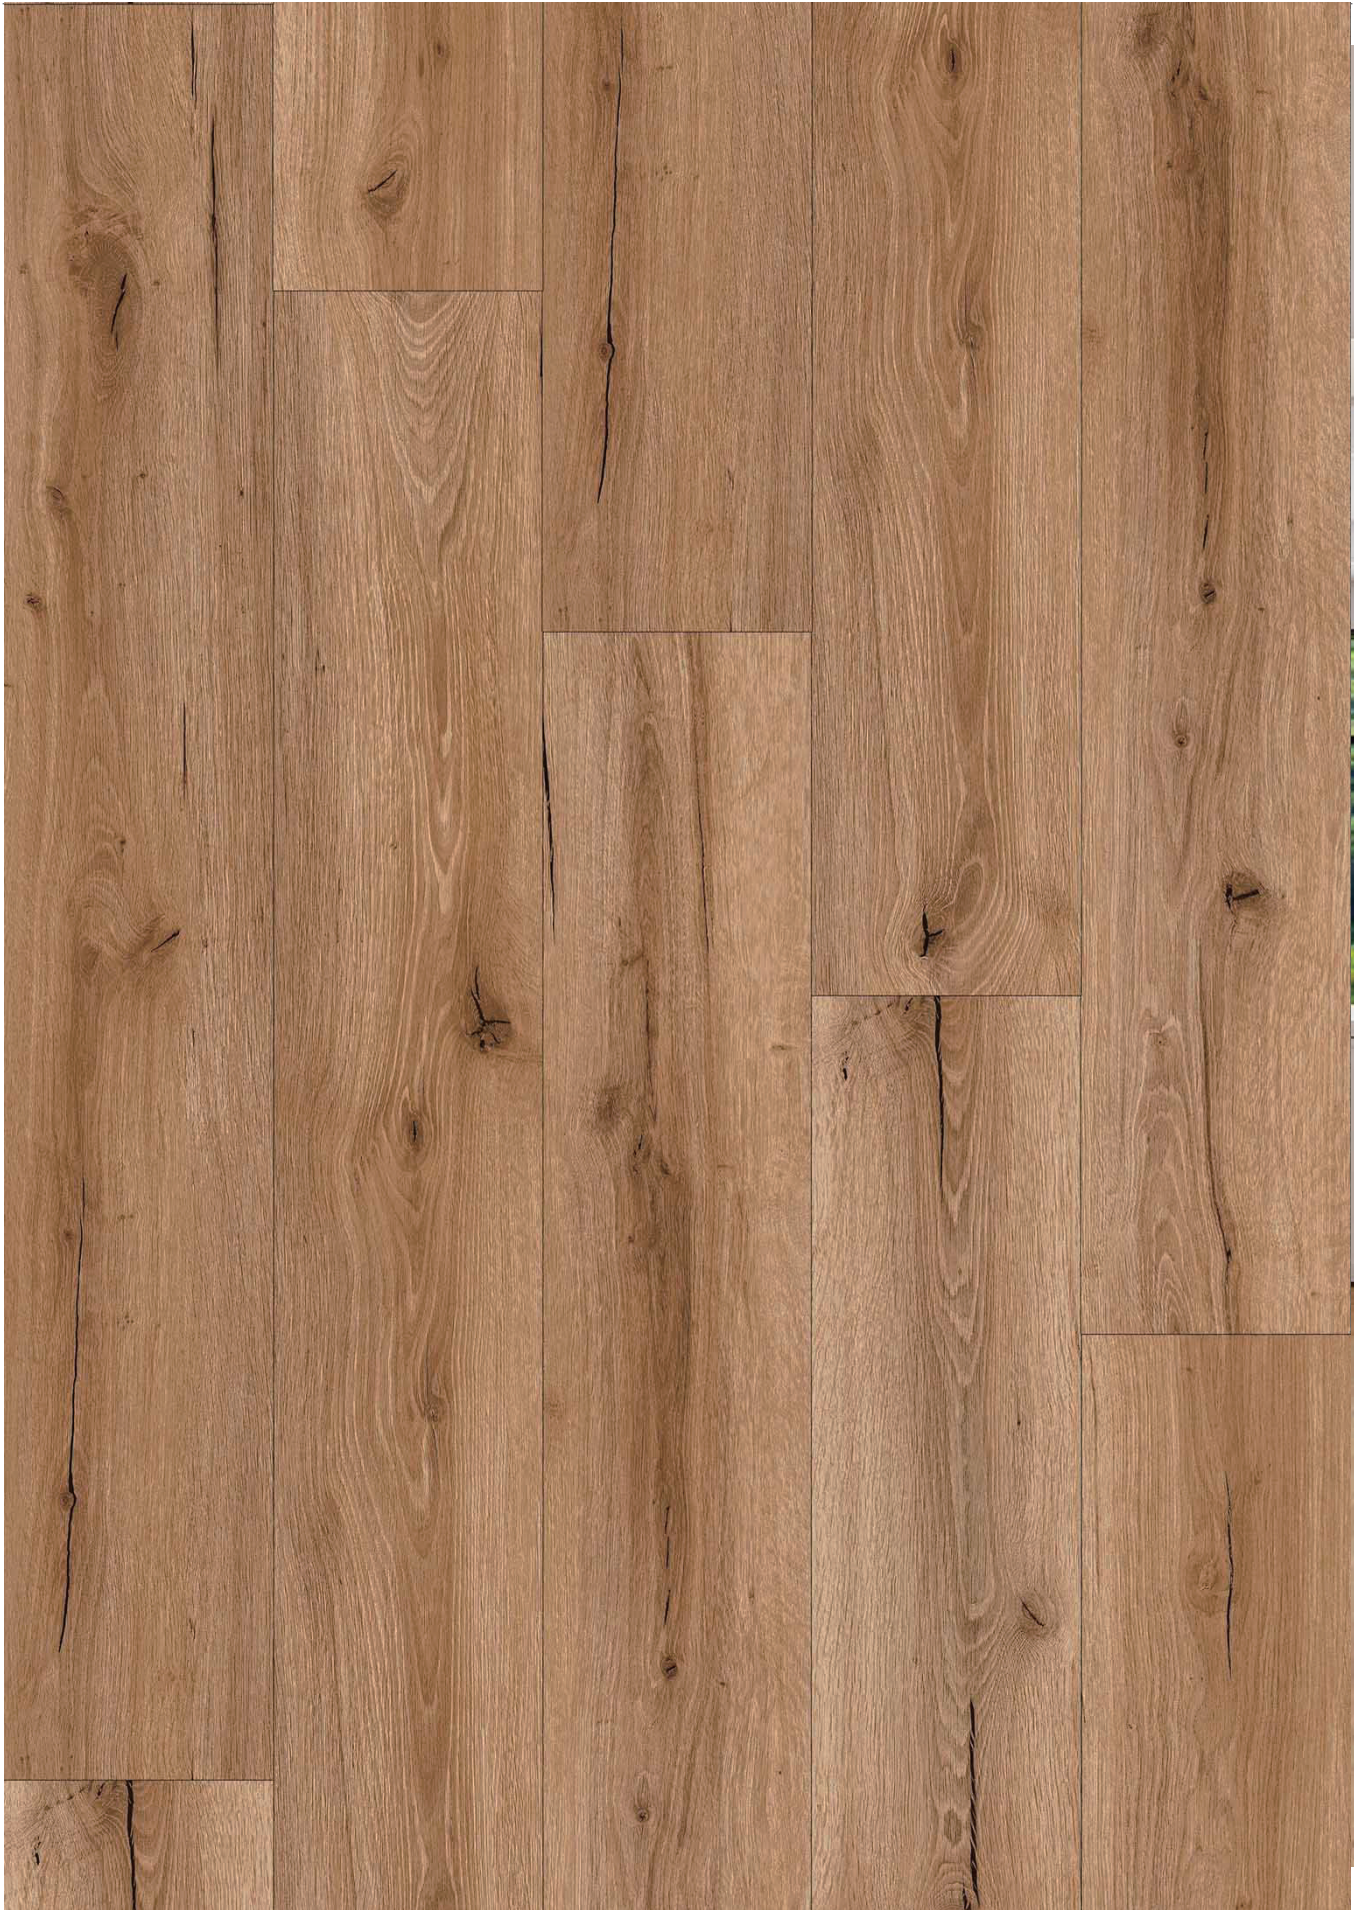

A dense forest scene with tall, thin trees and sunlight filtering through the canopy. The foreground is filled with lush green foliage, and the background shows a misty or sun-dappled forest floor.

Save Forest

Resilient Flooring



WPC Skirting 80
2400 x 80 x 12mm



T-moulding
2400 x 45 x 6mm




Reducer
2400 x 45 x 6mm



Resilient Flooring

[click system sample](#)

Stable SPC Floor **Structure**

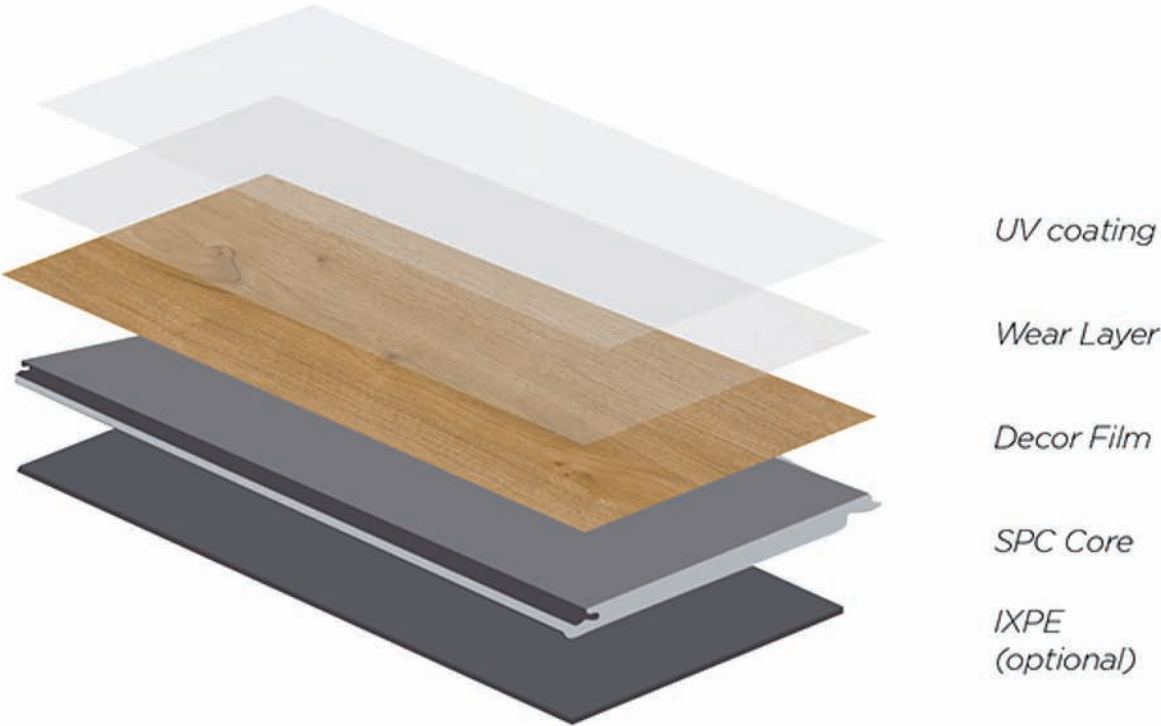

Factors

<p>LIFETIME Domestic warranty</p>	<p>5 YEARS Commercial warranty</p>	<p>Scratch resistance</p>	<p>Stable</p>	<p>Easy push down locking system</p>	<p>Slip resistant R10</p>	<p>Water resistant</p>	<p>Fire resistant Br-s1</p>	<p>VOC FREE</p>	<p>SOUND SUPPRESSION</p>	
---------------------------------------	--	---------------------------	---------------	--------------------------------------	---------------------------	------------------------	-----------------------------	-----------------	--------------------------	--

Technical Data Overview

Nr	Technical Items	Norm	Test Method	Requirement	Test Results	Conclusion
1	Abrasion/Wear Resistance	EN 16511	EN 15468	0.3mm wear layer \geq 1500 cycles; 0.5mm wear layer \geq 5000 cycles;	0.3mm wear layer \geq 1500 cycles; 0.5mm wear layer \geq 5000 cycles;	0.3mm wear layer, Class 31, Heavy domestic & Moderate commercial 0.5mm wear layer, Class 33, Heavy commercial
2	Scratch	-	ISO 1518-1	>2500g	3000g	Pass
3	Peel resistance	-	EN ISO 24345		Length direction: 125N/50mm Width direction: 140N/50mm	Pass
4	Residual indentation	EN 16511	EN 433/ISO 24343-1	\leq 0.15mm	0.02	Class 34, Very Heavy commercial
5	Impact resistance	EN 16511	EN 13329	\geq 1800mm	>1800mm	Class 34, Very Heavy commercial
6	Slip resistance	EN 14041	EN 13893	DryCOF \geq 0.3	0.37	Class DS
7	Color fastness to light	EN 13329	D 51130 ISO 105-B02:1994, Method 3a	\geq R9 \geq Grade 6	>R9 >Grade 6	Anti-spli resistance R10 Pass
8	Resistance to staining	EN 16511	EN 438-2	Group 1 and 2: Grade 5, Group3: Grade 4	Group 1 and 2: Grade 5, Group3: Grade 4	Class 34, Very Heavy commercial
9	Dimensional stability & curling	EN 16511	EN ISO 26987	Index 0	Index 0, not affected	
10	Water resistance/Swelling in water	EN 16511	ISO 23999	\leq 0.25%	Length direction: 0.08% Width direction: -0.02% Curling: 0.03mm	Class 34, Very Heavy commercial
11	Locking strength	EN 16511	ISO 24336	\leq 12%	0.20%	Class 34, Very Heavy commercial
12	Thermal conductivity	EN 14041	ISO 24334	Long side \geq 2.0KN/m Short side \geq 3.5KN/m	Long side: 4.9KN/m Short side: 4.2KN/m	Class 34, Very Heavy commercial
13	Thermal resistance	EN 14041	EN 12667	-	0.126 W/(m.k)	Suitable for underfloor heating system-max 27°C
14	Reaction to fire	EN 14041	EN ISO 10456 EN 13051-1	-	0.030 m2-KW Class Bfl -S1	Suitable for underfloor heating system-max 27°C Class Bfl -S1
15	Formaldehyde emission	EN 14041	EN 717-1	Release \leq 0.124 mg/m3	0.005mg/m3	E1
16	VOC	Decret No2011-321 Floorscore	ISO 16000 Californian 01350	TVOC < 1000µg/m3 Within CREL/TAC	Non Detected Non Detected	A+ Floorscore certified
17	Lead	CPSIA	CPSC-CH-E-1002-08	\leq 90ppm	Non Detected	Meet children toy regulation
18	PCP	EN 14041	EN 12673	< 1ppm	Non Detected	Pass
19	Phthalate content test		EN 14372	-	Non Detected	Pass
20	Substances of Very High Concern (SVHC)	EU REACH regulation No. 1907/2006	Spectrometry and chromatography	\leq 0.1% (w/w)	Non Detected	REACH compliant
21	The body Voltage	-	EN 1815: 2016 Method A	< 2 KV	0.4 KV	Pass
22	Castor Chair	EN 16511	EN 425	>25000 circles	>25000 ciftees	Class 34, Very Heavy commercial





BeneWood
luxury Flooring

